



9 Pin D-Sub Filtered Connector, π Circuit

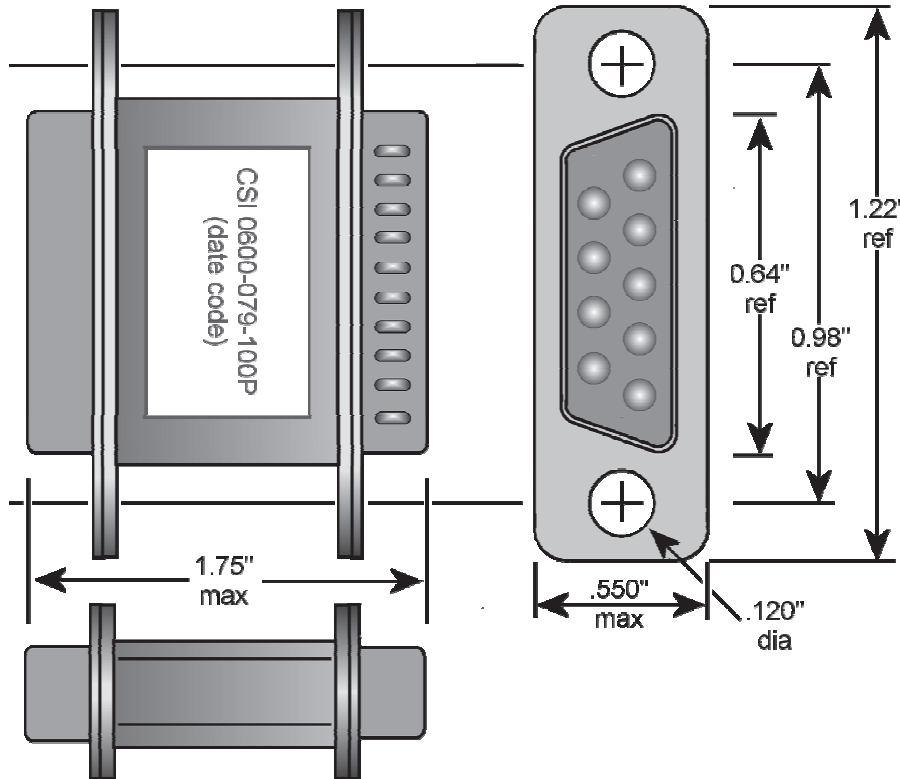

Operating Voltage:	100 VDC
Operating Current:	3 Amp DC
Insulation Resistance:	1000 M Ω min @ 50 VDC
Capacitance:	100 pf GVM (9 pins)
Inductance:	1 μ H minimum
Insertion Loss (50 Ω System)	
	2 dB @ 50 MHz
	6 dB @ 100 MHz
	12 dB @ 200 MHz
	30 dB @ 500 MHz
	40 dB @ 1 GHz

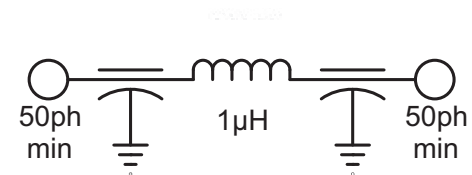

Drawings may not be to scale; refer to dimensions.